


# Int/Ext Dual Jacket Drop Cable

The cable is designed to allow the transition between the internal and external applications without changing cable types, reducing the need to splice. The outer jacket can be stripped back to reveal the internal grade cable to the required length for installation into the building.

Cable Diameter	4.5 mm
Jacket Material	UV stabilised, Low Smoke Zero Halogen (LSZH)
Type of Tube	Tight Buffer
Strength Member	Aramid Yarn
Fibre Type	G657-B3

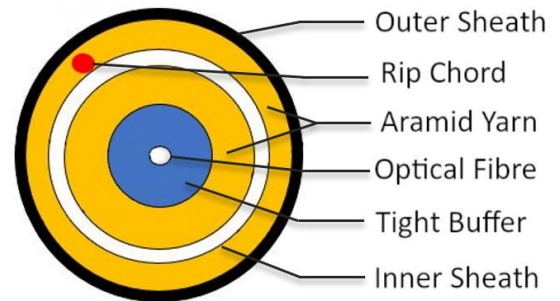

## APPLICATIONS

Suitable for internal/external use.  
Useful for direct burial and aerial installations

Cable Structure and Parameters	
Fibre Core	1
Tight Buffer Diameter	0.85 mm ± 0.05
Fibre per tube	1
Cable Diameter	4.5 mm ± 0.2
Fibre Type	G657-B3
Tension (Short Term)	200N
Short term crush N/10cm	1000
Life Expectancy	25 years
Min Bend Radius for installation	- Static - Dynamic
	15 x OD 25 x OD

Temperature Performance Range	-40°C to 70°C
-------------------------------	---------------